




# Sony Cyber-shot DSC-HX100V LCD Screen Replacement

This guide will display how to disassemble your camera to replace the screen.

Written By: DaQuawn

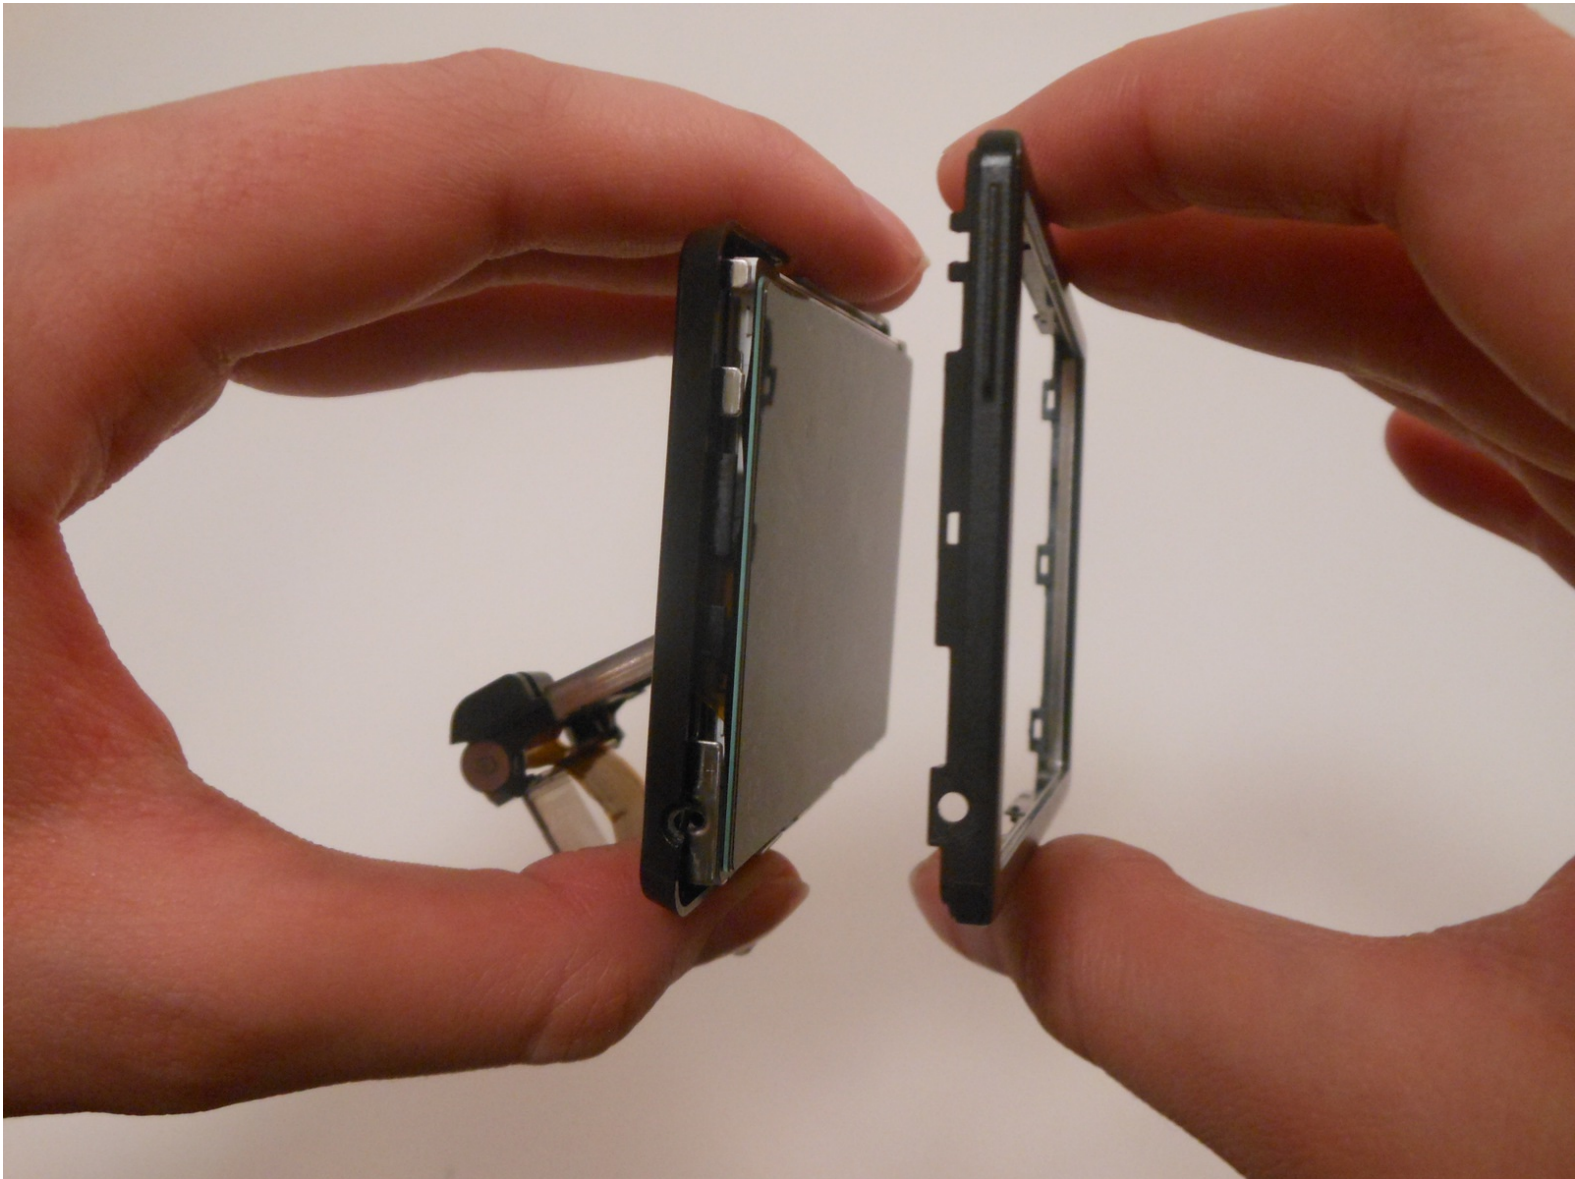

## INTRODUCTION

If your screen is cracked, broken, scratched, or otherwise in need of replacing, this guide will show you how to disassemble your camera, remove the screen, and replace it with a new one.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — LCD Screen



- **Make sure the camera is turned off.**
  - Press the ON/OFF button to turn off the camera.
- ⚠ Be careful, data may be lost if the camera remains on.

## Step 2



**i** Use the Phillips screwdriver size #00 to remove the 1.59mm #00 screws.

- Remove 2 screws on the side of the camera.
- Remove 4 screws on the bottom of the camera.
- Remove 1 screw next to the eyepiece.



## Step 3





- Tilt the screen forward.
- Remove the two 1.59mm #00 screws on the left with the Phillips #00 screwdriver.

## Step 4




- Pull the back panel of the camera upward.
- ⓘ Use the spudger to help pry open the back panel.

## Step 5

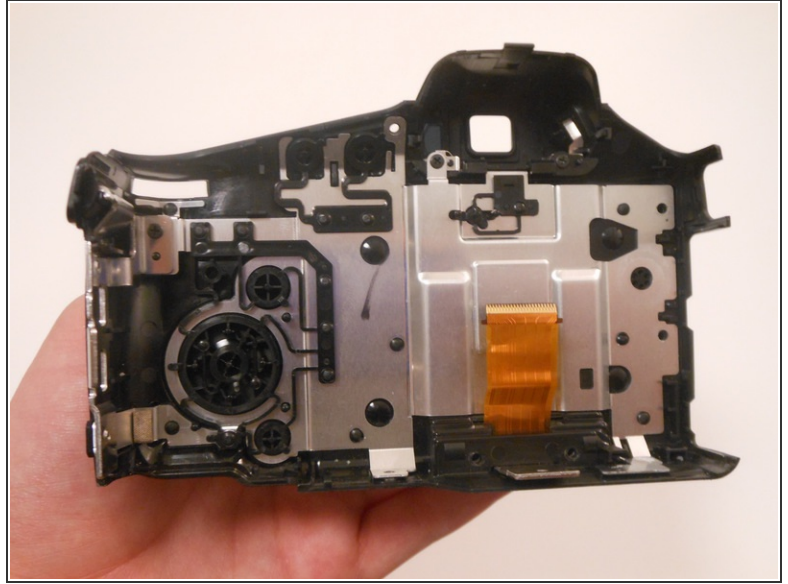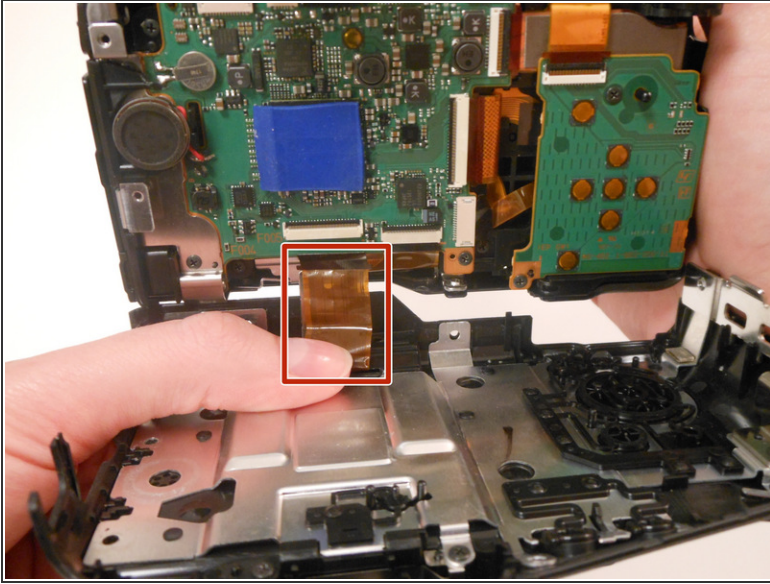

- Open the back panel to view the inside of the camera.
- Gently pull the orange ribbon cable to separate the two parts of the camera.
- ☑ Set the front part of the camera to the side.

## Step 6

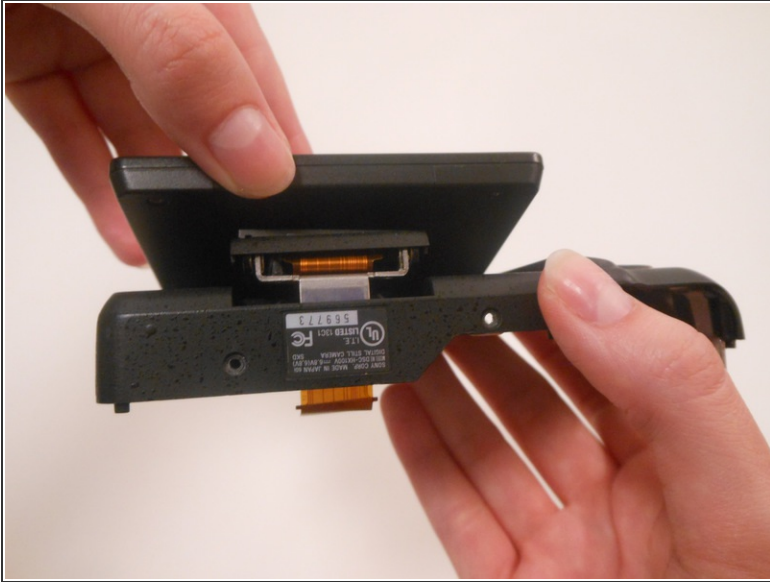

- Flip the entire back panel so that the screen is facing upwards.
- Lift the screen upwards to separate it from the back panel.
- ☞ Place the back panel off to the side. Now we will be focusing on the screen.
- Turn the screen so that the side with the screw is facing you.
- Remove the 1.59mm #00 screw with the Phillips #00 screwdriver.




## Step 7




- Flip the screen over to view the backside.
- Use a Phillips #00 screwdriver to remove the 1.59mm #00 screw.

## Step 8

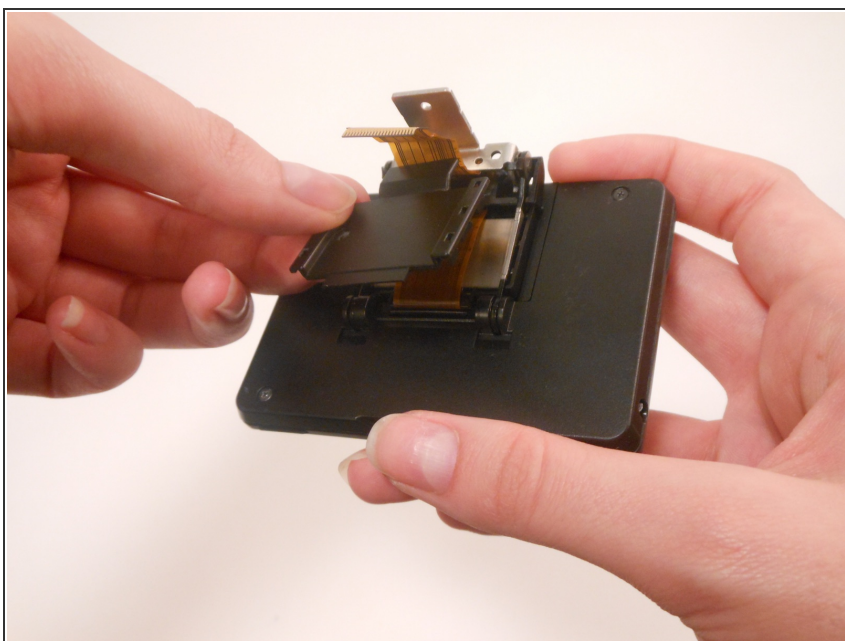


- Flip the screen so that the screen is facing downwards and the orange ribbon cable is on top.
- Lift the small, black panel to remove it from the screen.

## Step 9

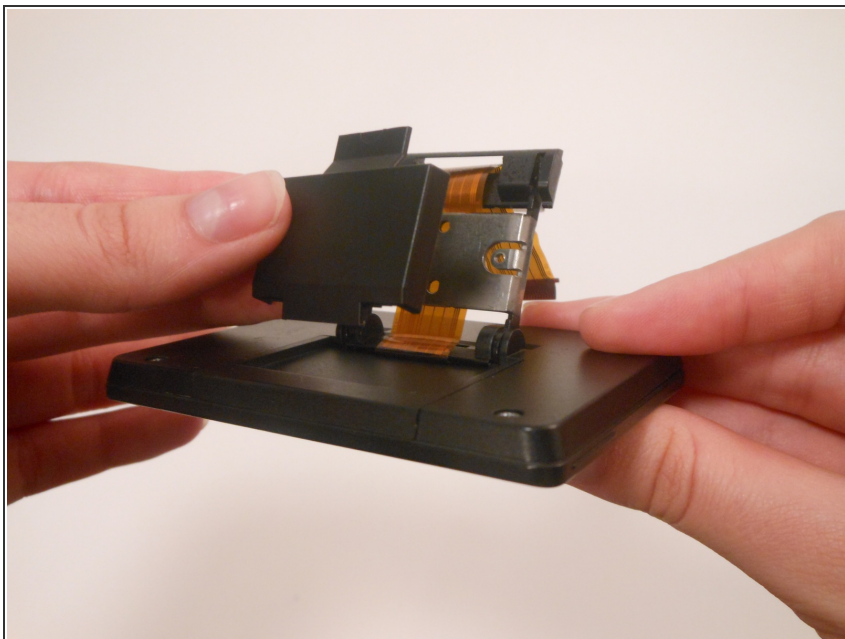

- Lift up the entire panel with the orange ribbon cable.
- ① Behind the orange ribbon cable is a small, black panel.
- Lift the panel upwards and remove it.


## Step 10

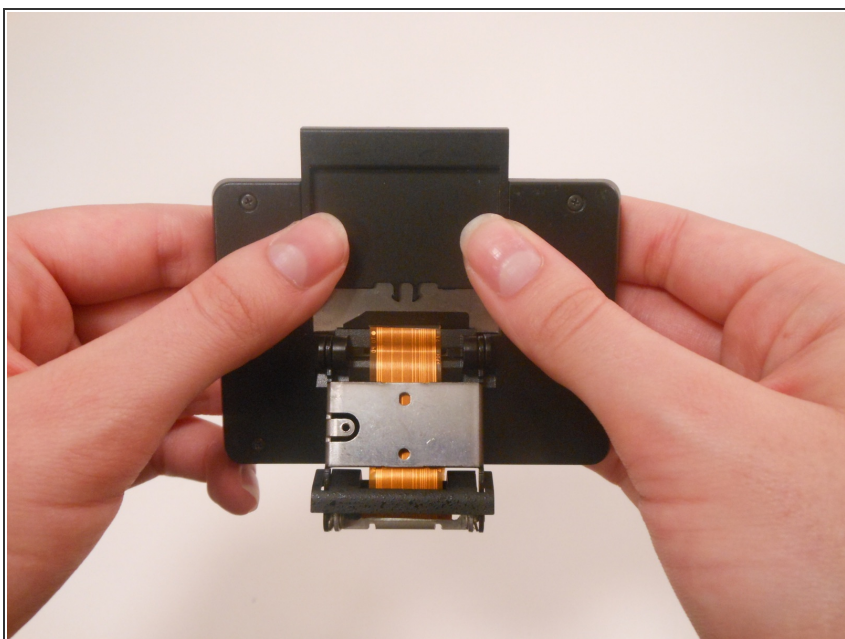

- Flip the screen so that the orange ribbon cable is facing downwards.
- Press on the sliding panel and slide it upwards to remove it.





## Step 11

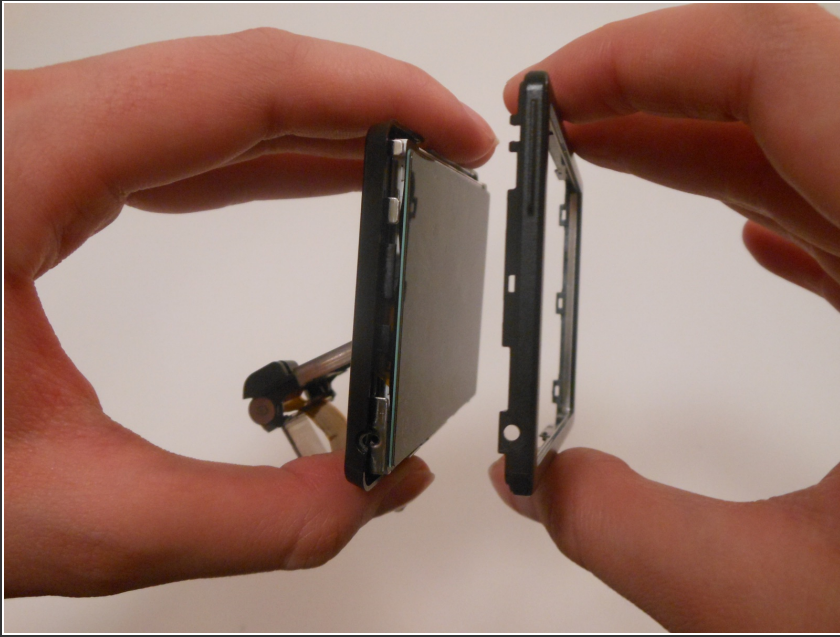



- Remove the frame from the screen.

## Step 12

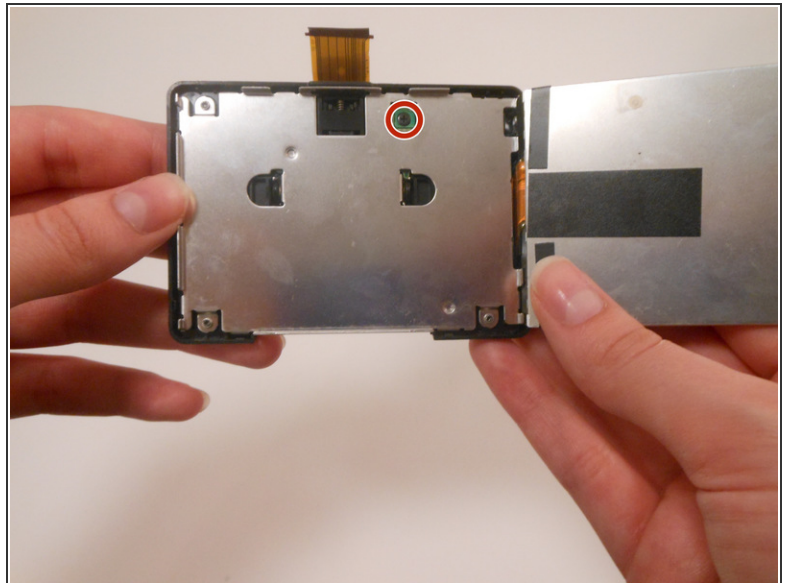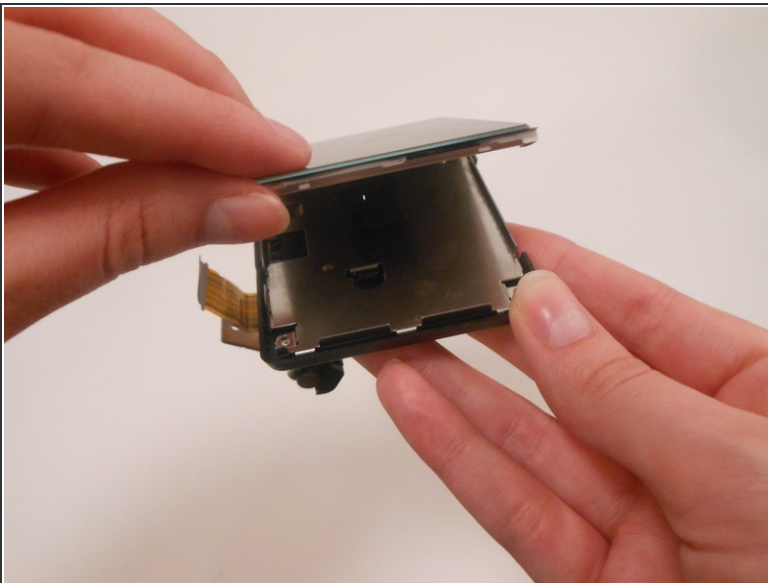



- Lift the screen upwards to view the inside.
- Use the Phillips screwdriver size #00 to remove the 1.59mm screw inside the green square.

## Step 13

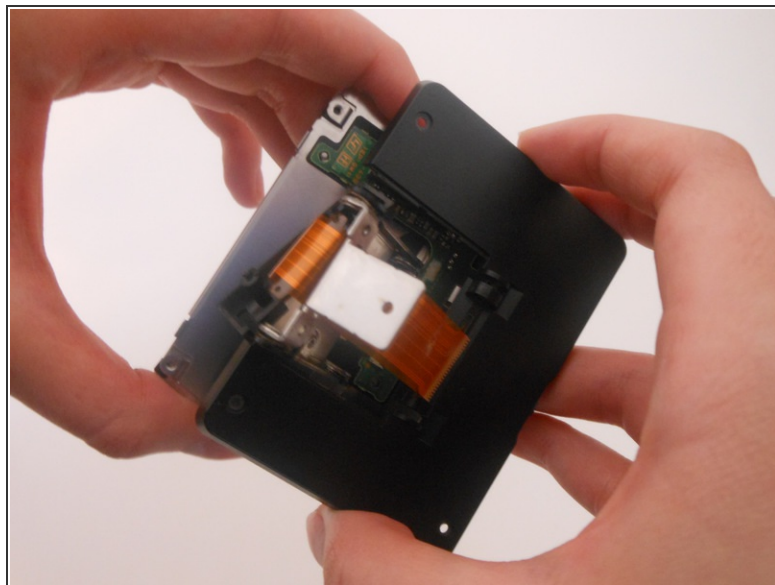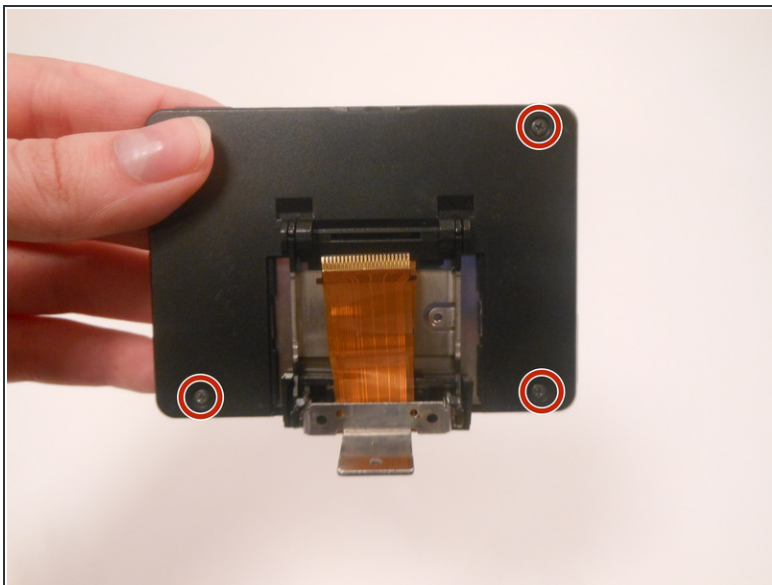

- Using a Phillips #00 screwdriver, remove the three 1.59mm #00 screws from the back panel.
- Lift up the black panel on the backside to remove.

## Step 14

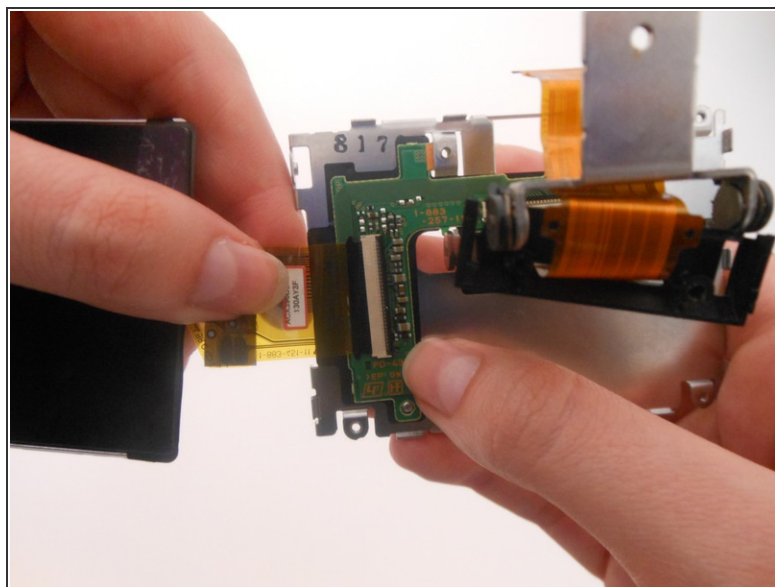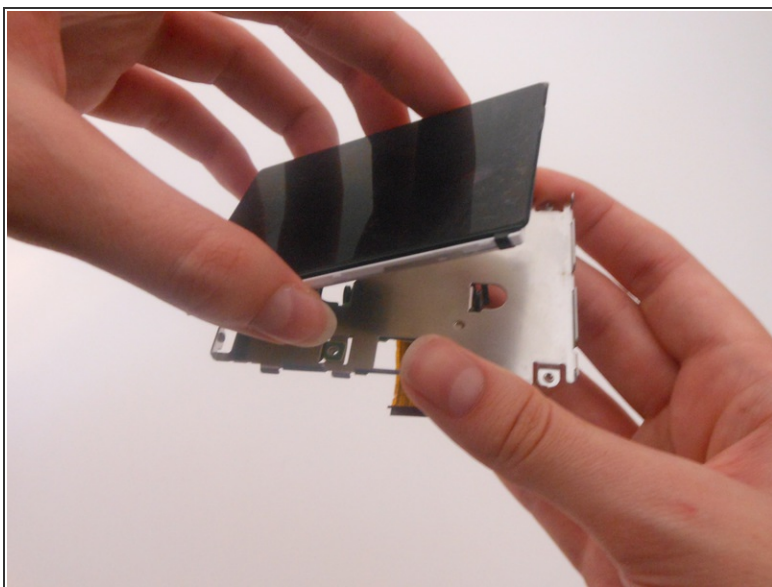

- Lift the entire screen upwards.
- Gently tug the orange ribbon cable to remove the screen from the silver panel.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-30 02:03:27 AM.